



1	2	3	4	5
REV	ECN NO	DESCRIPTION	DATE	APPROVED
AA	-	NEW RELEASED	2015.05.12	CLARA

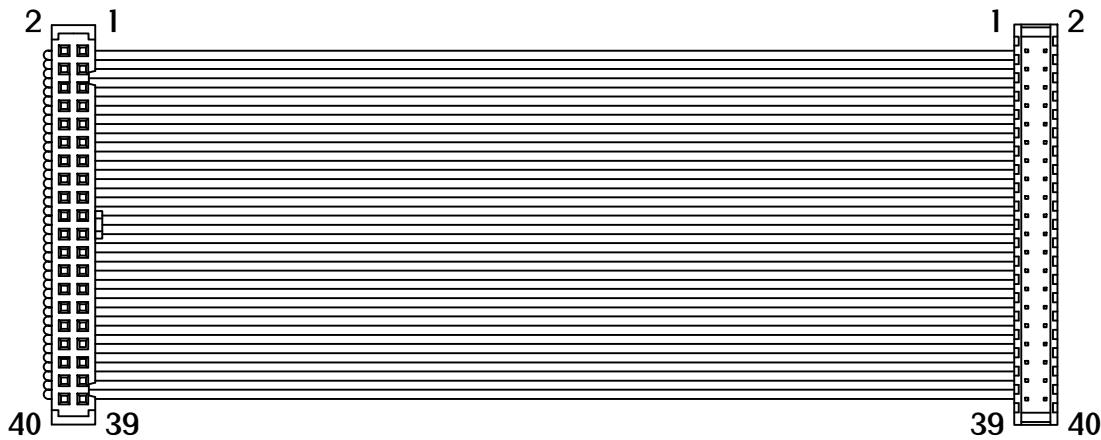


Material:

- . Housing: PBT, Black
- . Contact: Brass, Gold-plated

Technical Data:

- . Rated Voltage: 300V
- . Rated Current: 1A
- . Rated Temperature: -40°C~+105°C
- . Contact resistance: Initial value/10m Ω max.
After environmental testing/20m Ω max.
- . Insulation resistance: 1000M Ω min.
- . Withstanding voltage: 1500V AC/minute
- . Applicable Wire: 30AWG~26AWG



This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com

DESCRIPTION	FLAT DIP CABLE / FC FLAT CABLE			
DWG NO	FC-DIP	BOMCAN PART No	-	
DRAWN BY	CLARA 2015.05.12	CUSTOMER P/N	-	
CHECKED BY	CALEB 2015.05.12	SIZE: A4	SHEET	UNIT
APPROVED BY	BILL 2015.05.12	REV: AA	1 of 1	MM
			SCALE	Third angle projection
			FREE	