
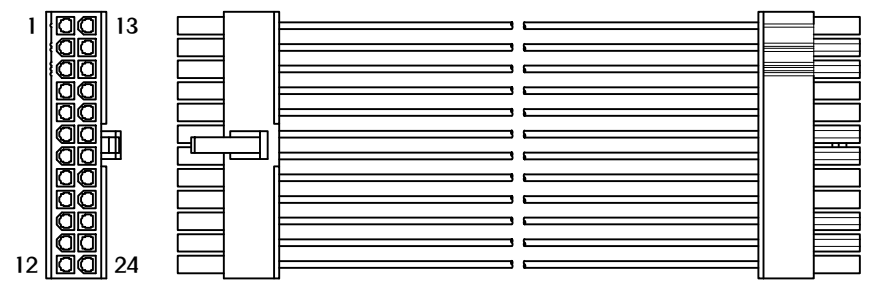



1		2		3		4		5		6		7		Customer drawing	
REV	ECN NO	DESCRIPTION		DATE	APPROVED										
AA	-	NEW RELEASED		2015.05.12	CLARA										

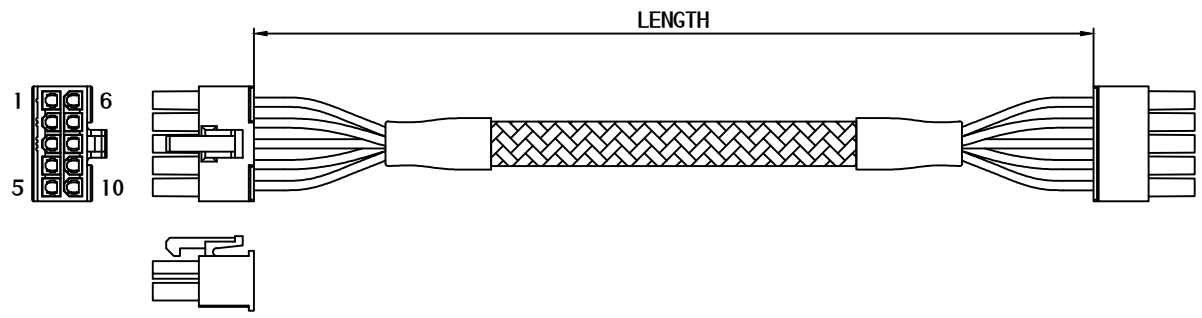

- Material:**
- . Housing: PA66, White, UL94V-2
 - . Contact: Phosphor bronze or brass, Tin-plated
- Technical Data:**
- . Rated Voltage: 250V AC, DC
 - . Rated Current: 7A
 - . Rated Temperature: -25°C~+85°C
 - . Contact resistance: Initial value/10m Ω max.
After environmental testing/20m Ω max.
 - . Insulation resistance: 1000M Ω min.
 - . Withstanding voltage: 1500V AC/minute
 - . Applicable Wire: 18AWG~24AWG

UNMARKED TOLERANCES				This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com									
DIMENSIONS	TOLERANCE			DESCRIPTION		2-24PINS DUAL ROW MINIFIT HOUSING TERMINAL WIRE HARNESS		BOMCAN PART No		-			
x.	±1.0	DWG NO		HARNESS MINI FIT		DRAWN BY		CLARA 2015.05.12		CUSTOMER P/N		-	
x.x	±0.5	DRAWN BY		CALEB 2015.05.12		CHECKED BY		BILL 2015.05.12		APPROVED BY		BILL 2015.05.12	
x.xx	±0.25	CHECKED BY		CALEB 2015.05.12		APPROVED BY		BILL 2015.05.12		REV: AA		1 of 1	
0 to 500	+15 / -0	APPROVED BY		BILL 2015.05.12		SIZE: A3		SHEET		UNIT		SCALE	
< 501	+3% / -0 of length	APPROVED BY		BILL 2015.05.12		REV: AA		1 of 1		mm		Free	
ANGLES		APPROVED BY		BILL 2015.05.12		REV: AA		1 of 1		mm		Free	
x°	±1°	APPROVED BY		BILL 2015.05.12		REV: AA		1 of 1		mm		Free	
										Third angle projection			
										A3			

www.bomcan.com