


REV	ECN NO	DESCRIPTION	DATE	APPROVED
AA	-	NEW RELEASED	2020.07.28	CLARA

Customer drawings

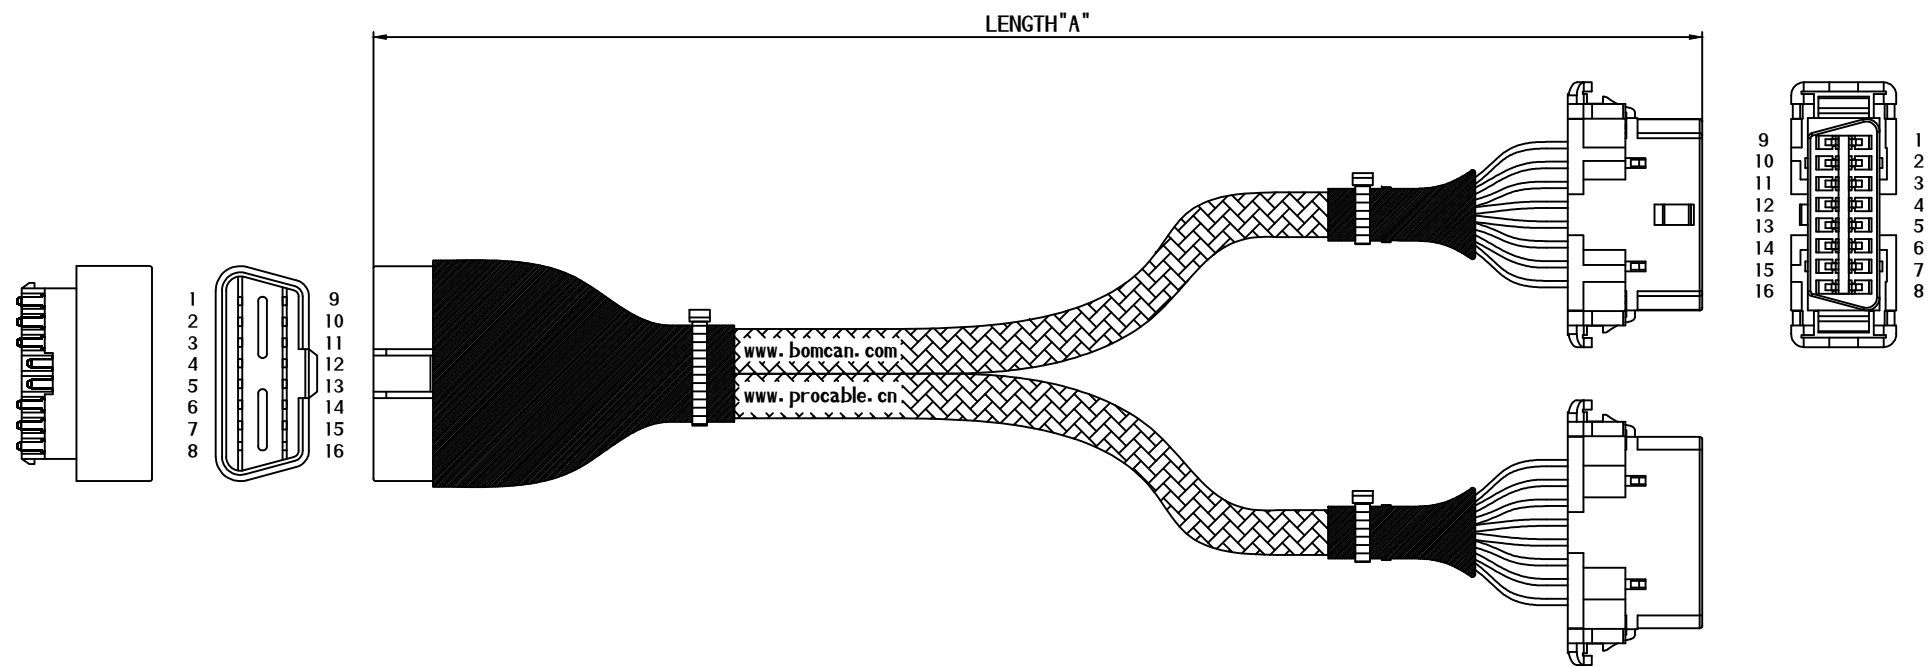

Electrical specifications:  
 Use of voltage range: 5~24V  
 Current range: 10A  
 Temperature range: -40°C~+85°C

Material specifications  
 Contact: Brass with gold plated  
 Insulation Housing: PBT, Black, UL94V-0

Electrical testing of finished cable  
 100% Open / Short / Miswiring testing  
 Insulation resistance: DC300V 10MΩ  
 Conductor resistance: 5Ω



UNMARKED TOLERANCES	
DIMENSIONS	TOLERANCE
x.	±1.0
x.x	±0.5
x.xx	±0.25
0 to 500	+15 / -0
< 501	+3% / -0 of length
ANGLES	
x°	±1°



This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com

DESCRIPTION	OBD-II AUTOMOTIVE HARNESS CABLE ASSEMBLY			
DWG NO	-	BOMCAN PART No	OBD-II	
DRAWN BY	CLARA 2020.07.28	CUSTOMER P/N	-	
CHECKED BY	CALEB 2020.07.28	SIZE: A3	SHEET	UNIT
APPROVED BY	BILL 2020.07.28	REV: AA	1 of 1	mm
		SCALE	Free	Third angle projection

A3

www.bomcan.com